

Features

- 1-channel isolated barrier
- 115/230 V AC supply
- Input for approved dry contacts or SN/S1N sensors
- Relay contact output
- Fault indication output
- Line fault detection (LFD)
- Up to SIL 3 acc. to IEC 61508
- Up to PL d acc. to EN/ISO 13849

Function

This isolated barrier is used for intrinsic safety applications.

The device transfers digital signals (SN/S1N proximity sensors or approved dry contacts) from a hazardous area to a safe area.

The input controls one output with 3 form A normally open relay contacts (one is in series to the 2 output relay contacts for the safety function), one output with 1 form A normally open relay contact, and one passive transistor output.

Unlike an SN/S1N series NAMUR proximity sensor, a mechanical contact, requires a 10 k Ω resistor to be placed across the contact in addition to a 1.5 k Ω resistor in series.


Lead breakage (LB) and short circuit (SC) conditions of the control circuit are continuously monitored.

During an error condition, fault output energizes and outputs I and II de-energize.

For safety applications up to SIL3, output I must be used.

Assembly

Front view

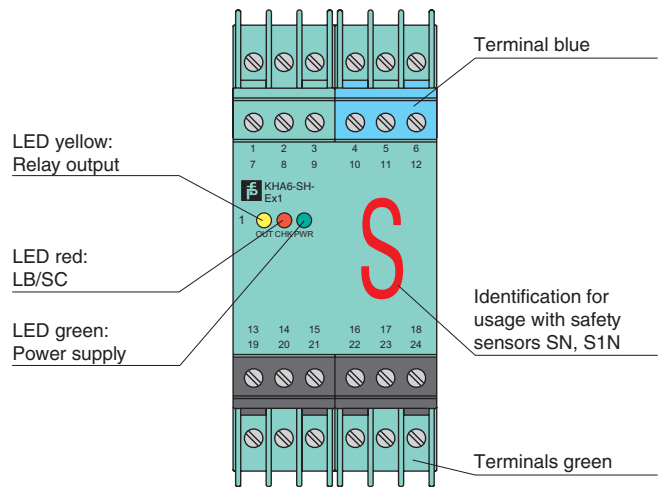


CE



SIL 3

Connection

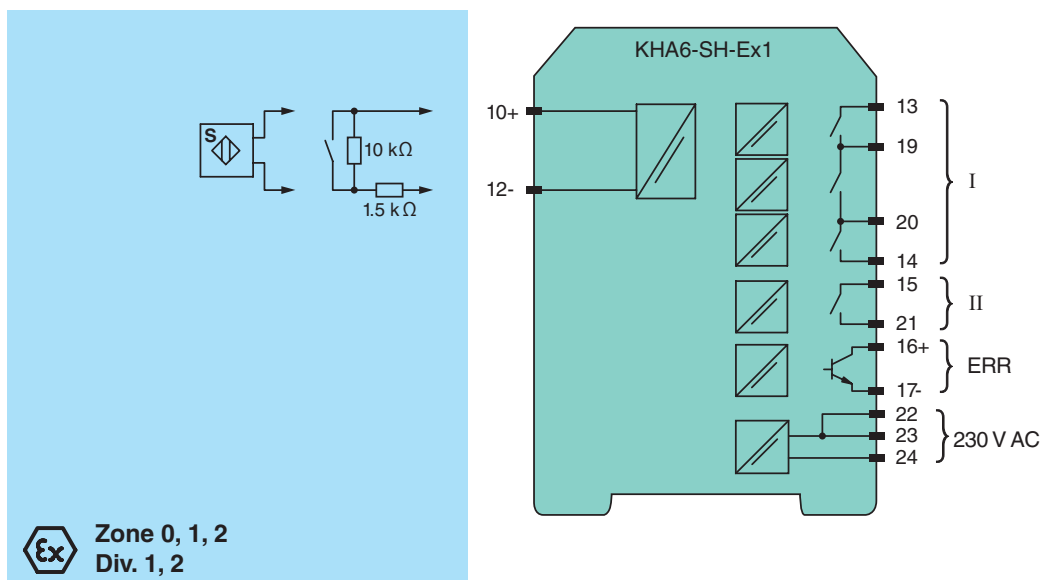

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

General specifications		
Signal type		Digital Input
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 3
Performance level (PL)		PL d
Supply		
Connection		terminals 22, 23, 24
Rated voltage	U_r	85 ... 253 V AC , 45 ... 65 Hz
Rated current	I_r	30 mA \pm 5 mA
Power dissipation		2.2 W
Power consumption		\leq 2.3 W
Input		
Connection side		field side
Connection		terminals 10+, 12-
Open circuit voltage/short-circuit current		approx. 8.4 V DC / approx. 11.7 mA
Lead resistance		\leq 50 Ω , in hazardous area cable capacitances and inductivities are to be taken into account
Switching point		
Relay de-energized		$I < 2.1$ mA and $I > 5.9$ mA
Relay energized		2.8 mA $< I < 5.3$ mA
Response delay		\leq 1 ms
Output		
Connection side		control side
Connection		output I: terminals 13, 14 ; output II: terminals 15, 21 ; output III: terminals 16+, 17-
Output I		relay , signal
Contact loading		253 V AC/1 A/cos $\phi \geq 0.7$; 24 V DC/1 A resistive load
Mechanical life		50 x 10 ⁶ switching cycles
Output II		relay , signal
Contact loading		253 V AC/1 A/cos $\phi \geq 0.7$; 24 V DC/1 A resistive load
Mechanical life		50 x 10 ⁶ switching cycles
Output III		electronic output, passive , fault signal
Rated voltage		10 ... 30 V DC
Signal level		1-signal: (L+) -2.5 V (7 mA, short-circuit proof) / 0-signal: blocked output (Leakage current \leq 10 μ A)
Transfer characteristics		
Switching frequency		5 Hz
Indicators/settings		
Display elements		LEDs
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Machinery Directive		
Directive 2006/42/EC		EN/ISO 13849-1:2008
Conformity		
Electromagnetic compatibility		NE 21:2011
Degree of protection		IEC 60529:2001
Safety		IEC/EN 61508:2010
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 280 g
Dimensions		40 x 93 x 115 mm (1.6 x 3.7 x 4.5 inch) , housing type E
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-Type Examination Certificate		PTB 00 ATEX 2043
Marking		Ⓔ II (1)GD [EEx ia] IIC [circuit(s) in zone 0/1/2]
Input		EEx ia IIC
Voltage	U_o	9.56 V
Current	I_o	16.8 mA
Power	P_o	41 mW (linear characteristic)

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Supply		
Maximum safe voltage	U_m	253 V AC/DC (Attention! The rated voltage can be lower.)
Type of protection [EEx ia]		
Type of protection [EEx ia and EEx ib]		
Output		
Contact loading		253 V AC/1 A/ $\cos \phi \geq 0.7$; 24 V DC/1 A resistive load
Maximum safe voltage	U_m	output I/output II: 253 V AC/DC (Attention! U_m is no rated voltage.)
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Function

The input (terminals 10, 12) may generally be operated only with **potentially free** (passive) switches.

Single channel operations up to SIL3 **must** occur via terminals 13 and 14. The center tap of the contacts (terminals 19, 20) can **also** be used if an operation is to occur a redundant branch.

If the device is used for safety operations the information in the test documents should be observed. The output III error message delivers a "1"-signal when the control circuit experiences lead breakage (LB) or a short circuit (LK).

The device (housing type E) has integrated terminals.

Maximal switching power of the output

